


MG 5000 – Tin 12 5kVA Tin 12 Petrol Generator

When looking for robust, reliable, good quality 5kVA Tin 12 petrol generator, look no further than our MG 5000 – Tin 12. Fusion models are designed to suit Tin 12 gas and water applications for butt + electro boxes – 110V CTE.

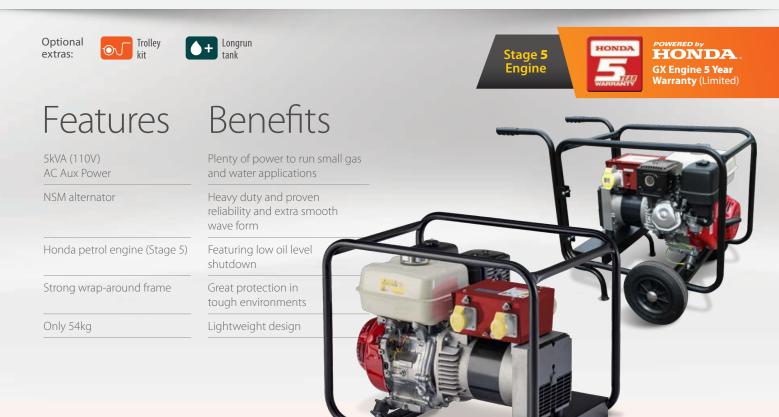

Specification

Performance

| Alternator | NSM K100 | F | Noise Level | LWA=96 dBa@7r | n=71 |
|------------------------|-----------------|------|---|---------------|--------|
| Single Phase Power (17 | 10V) 5kVA/4kV | N | Insulation Clas | S | Н |
| Single Phase Power (23 | 80V) N/. | A | Mechanical Protection – IP | | 23 |
| | | | | | |
| Engine | | Coo | ling | | Air |
| Make | Honda | Fue | Fuel Consumption @ 75% Load (Litres/hour) | | |
| Туре | GX270 (Stage 5) | Fue | Fuel Tank Capacity (Litres) | | |
| Fuel | Petrol | Ave | Average Runtime @ 75% Load (Hours) | | |
| Number of Cylinders | 1 | C02 | CO2 Output Per Hour @ 75% Load 4. | | .56kg |
| Power (HP) | 8.5 | Ctor | Starting System Re | | Recoil |
| Engine Speed (RPM) | 3000 | JPIC | | | Recoll |
| | | | | | |

Dimensions (Machine only

| Dimensions (Machine only) | | | | | |
|------------------------------------|----------------------|--------------------------------------|--|--|--|
| Length: 690 mm | Width: 480 mm | Height: 540 mm | | | |
| Dry Weight (No Fuel): 54 kg | Wet | Wet Weight (Fuel Full): 59 kg | | | |
| Dimensions (Trolley kit) | | | | | |
| Length: 810 mm | Width: 630 mm | Height: 730 mm | | | |
| Dry Weight (No Fuel): 59 kg | Wet | Wet Weight (Fuel Full): 64 kg | | | |
| | | | | | |
| Socket Configuration | 1ph (110V) | | | | |
| Socket Configuration | 32A | 16A | | | |
| MG 5000 – Tin 12 | 1 | 2 | | | |

For more details call **MHM TODAY** on **0808 168 9099**

Email sales@mhmplant.com or visit us at www.mhmplant.com

