Portable Mobile //

BABY-LITE (LED-4)



4M

MAS1

Lighting Tower complete with **Silenced 4kVA Diesel Generator**

When looking for a portable, easy to manage and highly versatile lighting solution, look no further than our MHM Lightower Baby-Lite (LED-4).



Features

LIGHTING TOWER

	Front side & roor fork poskets	4 x 200W LED 360° swivel & tilt lighting head (230V or 110V power required) 4m vertical stainless steel vertical mast
Generator can be removed in under 10 minutes	Front, side & rear fork pockets Generator can be removed in under 10 minutes	(230V or 110V power required) 4m vertical stainless steel vertical mast Front, side & rear fork pockets
		(230V or 110V power required) 4m vertical stainless steel vertical mast Front, side & rear fork pockets
4m vertical stainless steel vertical mast		

GENERATOR

4kVA (230V/110V) AC generator power Linz alternator Kohler/ Lombardini diesel engine HVO (Hydrotreated Vegetable Oil) fuel approved Silenced canopy

Benefits

LIGHTING TOWER

	n² of illuminated overage
For qu	lick and simple erection
For ea	sy lifting on site
Allowi	ing the use of either the lighting rig or generator separately
For ea	sy portability and set up

GENERATOR

Plenty of power to run the lighting head plus small tools on site Heavy duty and proven reliability Electric start, power, reliability & robust strength Suitable to run off either diesel, HVO or a mixture of both fuels

Reduced noise level







BABY-LITE (LED-4) C/W Silenced 4kVA Diesel Generator




4M MAST



Generator can be removed



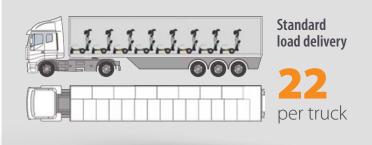

2,300m²

Light Coverage

Specification

Performance		Three Phase Power (400v)	N/A	
Alternator	Linz	Noise Level LWA=95 dBag	@7m=70	
Single Phase Power (110V)	4kVA/ 3.2kW	Insulation Class	Н	
Single Phase Power (230V)	4kVA/ 3.2kW	Mechanical Protection – IP 2		
Engine				
Make Koh	ler/ Lombardini	Cooling	Air	
Туре	15LD350	Fuel Consumption – Litres/hour	0.6	
Fuel Diesel / HVO (HVO = E	BS EN 15940:2016 Only)	Fuel Tank Capacity — Litres	13	
Number of Cylinders	1	Average Runtime 'All Lights On'	22	
Power — HP	6.5	CO2 Output Per Hour 'All Lights On'	1.57 kg	
Engine Speed — RPM	3000	Starting System	Electric	
Lighting		Max Mast Height	4m	
Light Coverage	2,300m ²	Mast Type	Manual	
Lighting Head	4 x 200W LED	Certified Wind Stability 110kph	/ 70mph	

Dimensions (Flat base plate to fit generator)									
Length: 1080 mm	Width: 590 mm	Maximum Load Weight:	275 kg						
Dimensions (Storage mode: handles folded in, stabilisers up & mast down)									
Length: 1470 mm	Width	: 865 mm	Height: 1900 mm						
Dimensions (Operating mode: handles folded out, stabilisers down & mast up)									
Length: 1870 mm	Width	: 865 mm	Height: 4000 mm						
Dry Weight (No Fuel)	: 298 kg	Wet Weig	Wet Weight (Fuel Full): 312 kg						

Socket	1ph (230V)		1ph (110V)	
Configuration	32A	16A	32A	16A
Generator	-	1	1	1

For more details call **MHM TODAY** on 0808 168 9099

Email sales@mhmplant.com or visit us at www.mhmplant.com



Picture shown for illustration purposes only. Actual product may differ in appearance. All specifications are subject to change.